


# PowerTorq Rotary Actuators

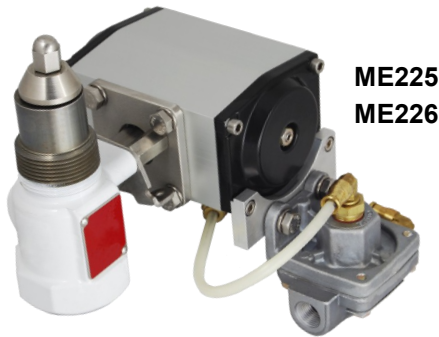

## Features:

- **Stainless Steel** all weather mounting hardware
- Actuator unit field repairable under full tank pressure
- Direct drive design does not apply side load to internal valve stem packing for maximum valve life
- No pinch points for operator safety
- Heavy duty pneumatic actuator with 212°F. eutectic fire protection
- Specifically designed for Fisher® Internal Valves & ESV
- Anodized aluminum actuator body with easy to read open/close indicator
- Easy to assemble and can be oriented to suit installation
- Operating Pressure Limits: Minimum - 25 PSIG  
Maximum - 125 PSIG  
Recommended - 40-60 PSIG
- Features low temperature seals for use with compressed air, nitrogen, or LPG
- Includes mounting bracket for ME707 Quick Release Valve (not required)

Actuators		
Part No.	Description	Fits
ME 225	PowerTorq Actuator	Fisher C407 - 1-1/4" Threaded Internal Valve
ME 226	PowerTorq Actuator	Fisher C402, C421, C427 2" & 3" Threaded Internal Valve
ME 227	PowerTorq Actuator	Fisher C403-24 Series Double Flanged Internal Valve
ME 228	PowerTorq Actuator	Fisher C404-32 Series Single Flange Internal Valve
ME 552	PowerTorq Actuator	Fisher N550 Series Emergency Shut Off Valve (1-1/4", 2" & 3")

Accessories	
Part No.	Description
ME 707	Quick Release Valve - 1/4" FNPT Inlets and Outlets
ME 708	Air Pressure Regulator 0-150 PSI - 1/8" FNPT Gauge Ports - 1/4" FNPT Inlet & Outlet with Mounting Bracket
ME 709	1/4" FNPT x 1/4" MNPT LP Gas and Air Filter - Aluminum

\*\* All PowerTorq Actuators are supplied with heavy duty DOT approved 1/4" tube inlet quick connect swivel and all necessary hardware for easy installation.\*\*