




CUT OUT DIMENSIONS


Allow minimum of 5 1/2" clearance from the grill's rear edge (6 1/4" from cutout) to the backsplash to allow the hood to fully open.

Rotisserie Motor can be installed either on the right hand side or left hand side.

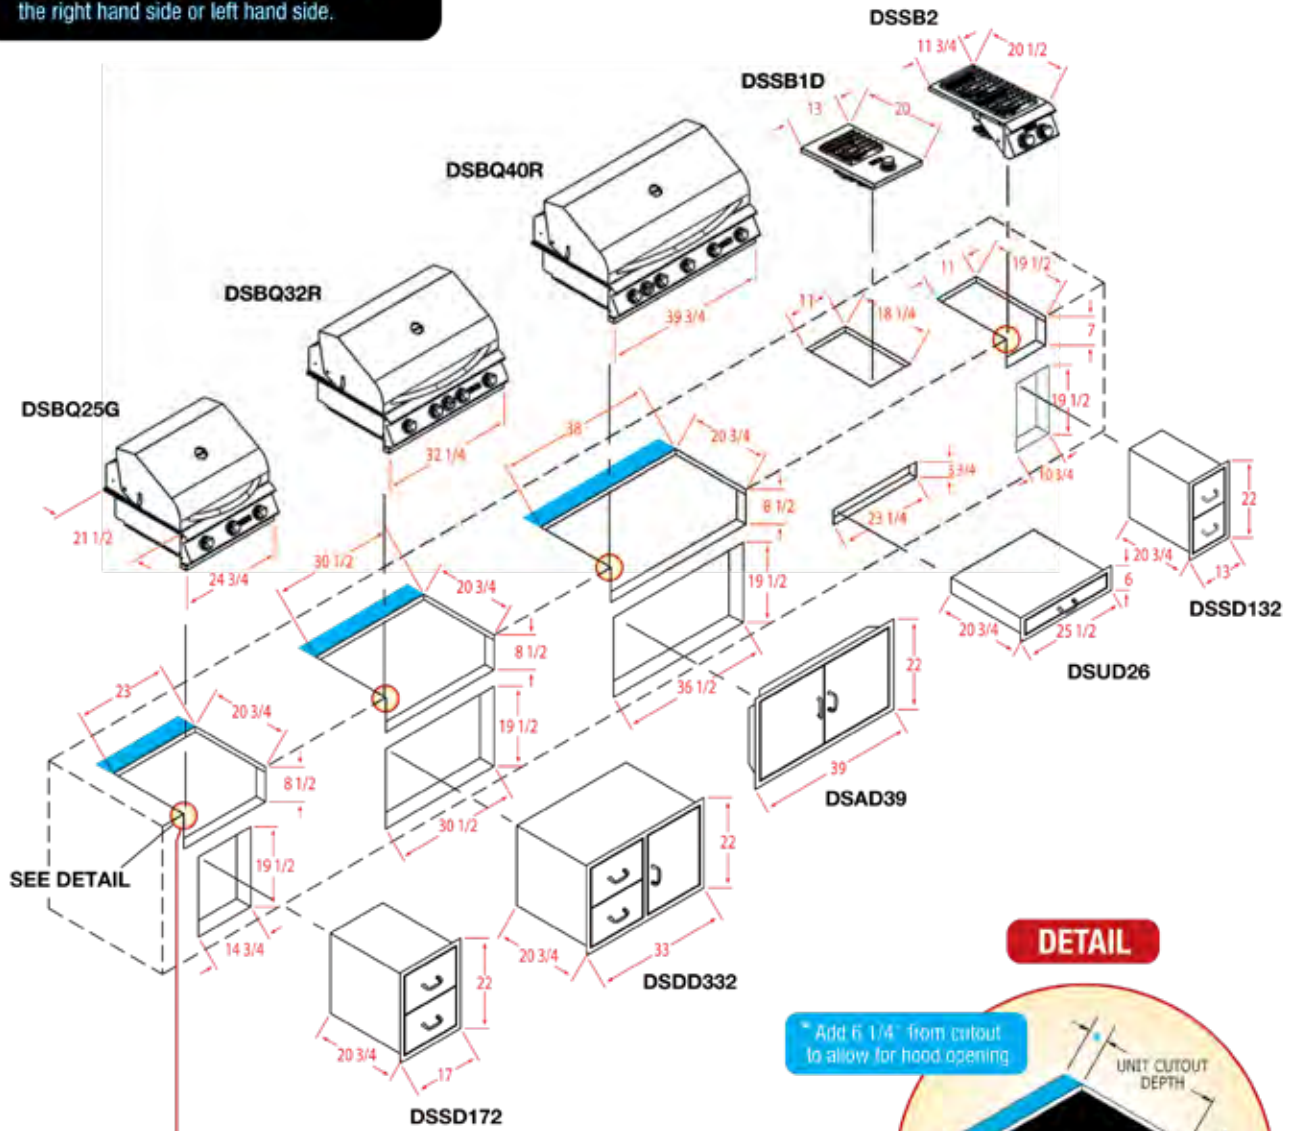

DETAIL

Add 6 1/4" from cutout to allow for hood opening

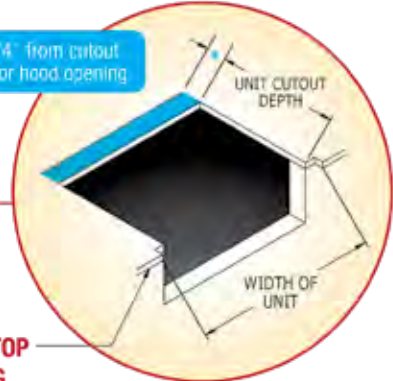

COUNTERTOP OVERHANG

Note: Required to ensure a flush fit of all grills and the double side burner.



The information provided is for reference purposes only. Detailed instructions and specifications unique to the product purchased can be found in the Manufacturer's Owner's Manual.

INSULATING JACKETS

For installation in combustible construction

CUT OUT DIMENSIONS

MODEL	A	B
DSIJ25	29 3/8	27 1/2
DSIJ32	36 7/8	35
DSIJ40	44 3/8	42 1/2

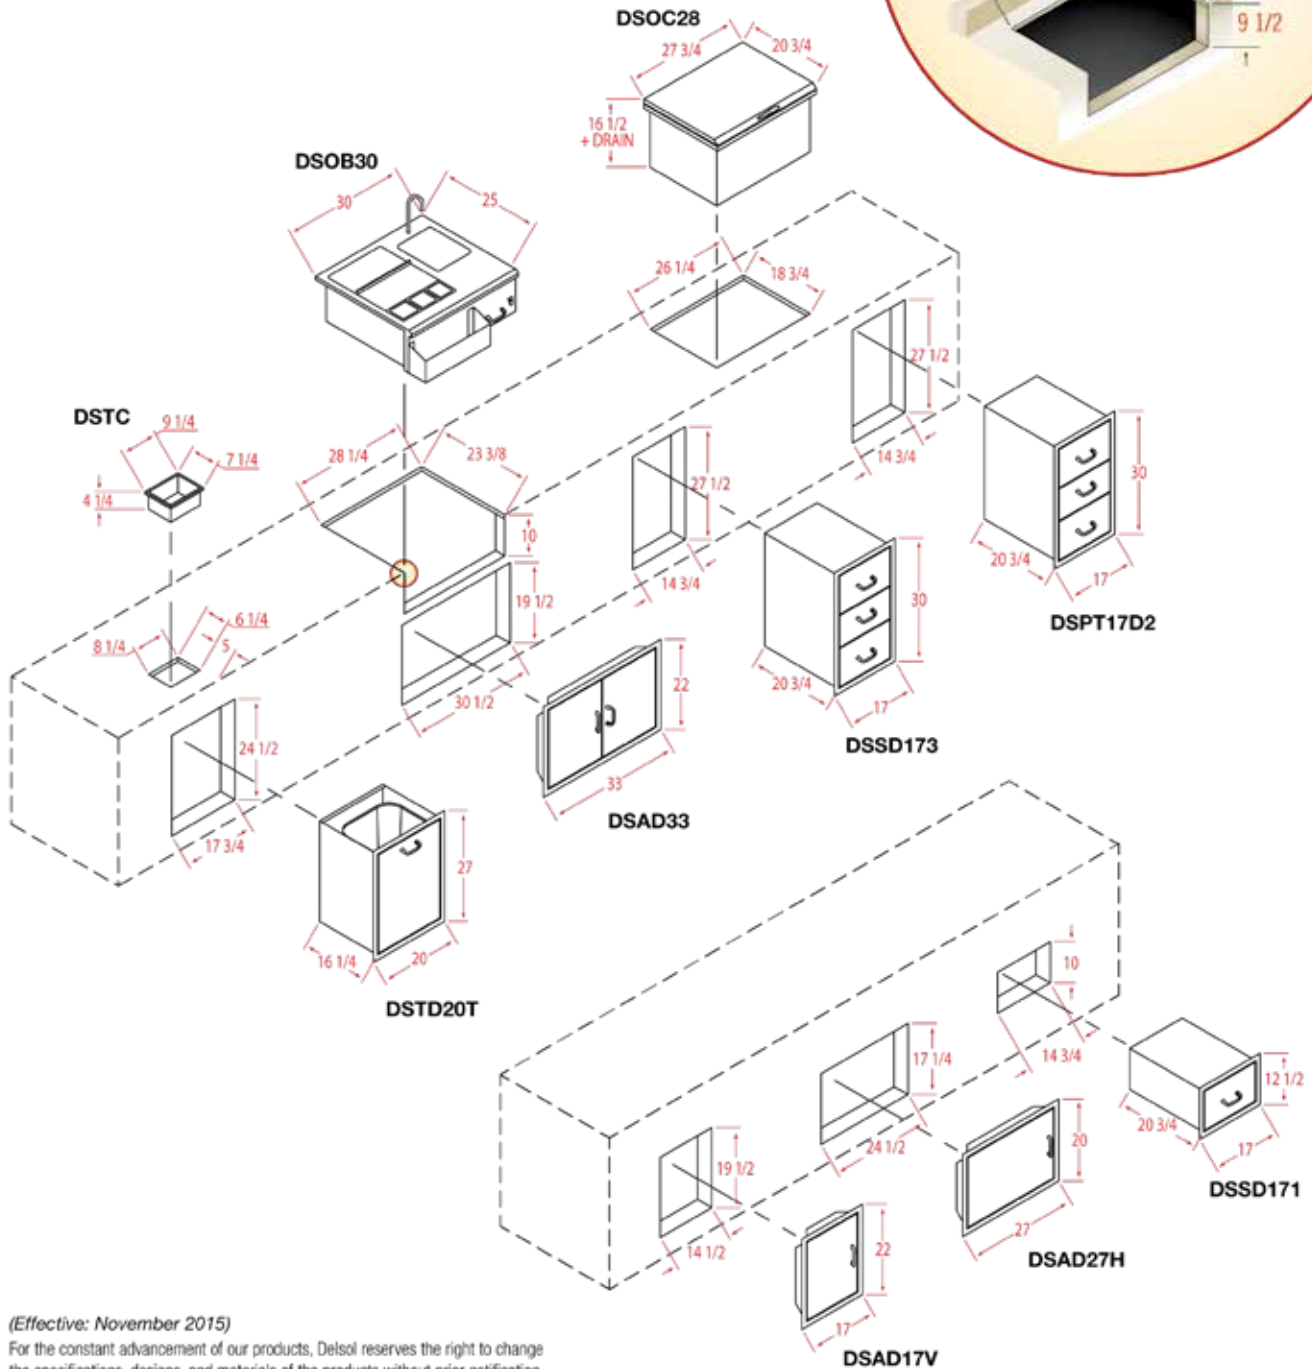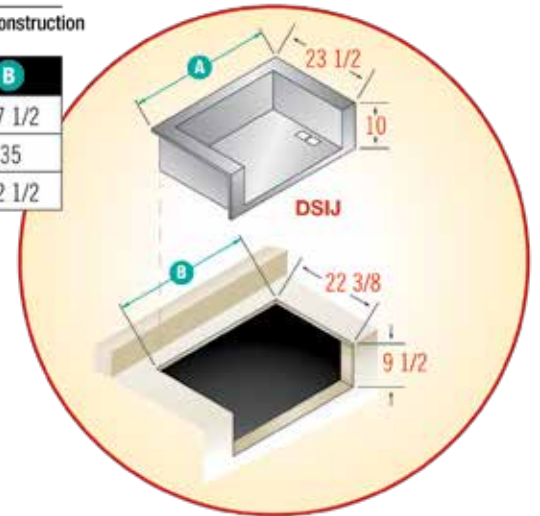

(Effective: November 2015)

For the constant advancement of our products, Delsol reserves the right to change the specifications, designs, and materials of the products without prior notification.

The information provided is for reference purposes only. Detailed instructions and specifications unique to the product purchased can be found in the Manufacturer's Owner's Manual.