


1/2" inner diameter extremely flexible stainless steel hose to provide the most durable hose for your cryogenic transfer applications. Machine flare ends and stainless steel hex nuts are standard on these hoses.



RMI Part No.	Description
TCHISS048G	CGA 295 1/2" FX 1/2" F 48" with armor
TCHISS072G	CGA 295 1/2" FX 1/2" F 72" with armor
TCHOSS048G	CGA 440 5/8" FX 5/8" F 48" with armor
TCHOSS072G	CGA 440 5/8" FX 5/8" F 72" with armor
FA50090	Liquid Cylinder QC CGA 295 90 degree 1/2" SS
FA500S	Liquid Cylinder CGA 295 straight 1/2" SS
FA62590	Liquid Cylinder QC CGA 440 90 degree 5/8" SS
FA625S	Liquid Cylinder QC CGA 440 straight 5/8" SS
FA625T	Liquid Cylinder QC T Adapter CGA 440 5/8" SS

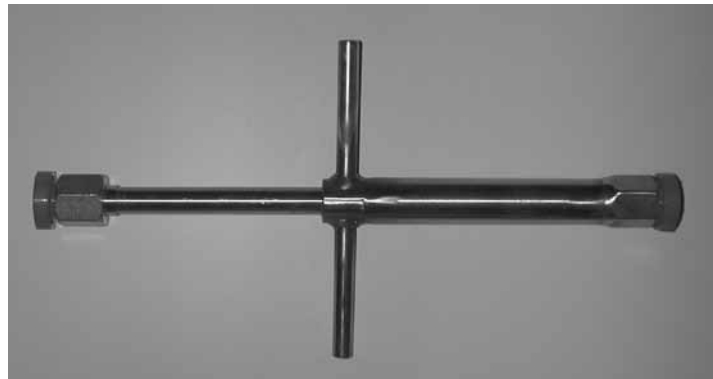

FA500S



FA625T

HOSES - PIGTAIL ASSEMBLIES

TEFLON LINED STAINLESS STEEL BRAIDED PIGTAILS - 3000 PSIG

Teflon core pigtails surpass the requirements of CGA E.9. Constructed with a smooth core of white PTFE and exterior 300 series stainless steel braid. Highly flexible and lightweight. Each pigtail is pressure tested to 1 1/2 times working pressure.



**TSC, 3000 PSIG RATED, 1/4" FEMALE NPT BRASS END FITTINGS
WORKING PRESSURE 3000 PSIG/BURST PRESSURE 12,000 PSIG**

RMI Part No.	LENGTH	SERVICE	ID	OD (no armor)	OD (w/armor)	# BRAIDS	DYNAMIC BEND RADIUS
PF2-4-12	12"	Oxygen Clean	1/4"	0.375"	0.54"	1	3.0"
PF2-4-18	18"	Oxygen Clean	1/4"	0.375"	0.54"	1	3.0"
PF2-4-24	24"	Oxygen Clean	1/4"	0.375"	0.54"	1	3.0"
PF2-4-36	36"	Oxygen Clean	1/4"	0.375"	0.54"	1	3.0"
PF2-4-48	48"	Oxygen Clean	1/4"	0.375"	0.54"	1	3.0"
PF2-4-72	72"	Oxygen Clean	1/4"	0.375"	0.54"	1	3.0"
PF2-4-84	84"	Oxygen Clean	1/4"	0.375"	0.54"	1	3.0"
PF2-4-120	120"	Oxygen Clean	1/4"	0.375"	0.54"	1	3.0"
PF2-4-240	240"	Oxygen Clean	1/4"	0.375"	0.54"	1	3.0"

**"SAFETY PIGTAIL" TSC W/ ANTI-WHIP, ANTI-KINK, STAINLESS STEEL ARMOR CASING, 1/4" FEMALE NPT ENDS
WORKING PRESSURE 3000 PSIG/BURST PRESSURE 12,000 PSIG**

RMI Part No.	SERVICE	ID	OD (no armor)	OD (w/armor)	# BRAIDS	DYNAMIC BEND RADIUS
5TSC-144-144-XX-A	Inert	1/4"	0.375"	0.54"	1	3.0"
5TSC-144-144-XX-A-CCB	Oxygen Clean	1/4"	0.375"	0.54"	1	3.0"



PIGTAIL OPTIONS (fitting part number change in parenthesis):

CALL RMI FOR ASISTANCE

- Brass male NPT (114) end fitting instead of female NPT (144)
- Brass street elbow installed and pressure tested (PL-4HP)
- Brass CGA Nut and Nipple installed and pressure tested
- Brass CGA Handtight Nut and soft-tip nipple installed and pressure tested
- Brass CGA Nut and Check Valve nipple installed and pressure tested
- Brass CGA NUT and Check Valve Nipple installed and pressure tested
- Brass extension Adapter (BE-4-3HP)
- 316SS MNPT fitting-per end (214)
- 316SS FNPT fitting-per end (244)
- 316 FNPA special swivel fitting (244S)

