

10 SERIES - 3/8" OD (1/4" ID)

RMI Part No. 1/2" MIP x 1/2" MIP	RMI Part No. 1/2" MIP x 1/2" FIP	Length	BTU Capacity (LP)
10-3131-12	10-3132-12	12"	76,800
10-3131-18	10-3132-18	18"	70,080
10-3131-24	10-3132-24	24"	64,000
10-3131-30	10-3132-30	30"	58,240
10-3131-36	10-3132-36	36"	53,440
10-3131-48	10-3132-48	48"	45,280
10-3131-60	10-3132-60	60"	39,840
10-3131-72	10-3132-72	72"	36,960



30-3131-36



20 SERIES - 1/2" OD (3/8" ID)

RMI Part No. 1/2" MIP x 1/2" MIP	RMI Part No. 1/2" MIP x 1/2" FIP	Length	BTU Capacity (LP)
20-3131-12	20-3132-12	12"	163,200
20-3131-18	20-3132-18	18"	148,960
20-3131-24	20-3132-24	24"	136,000
20-3131-30	20-3132-30	30"	123,360
20-3131-36	20-3132-36	36"	113,760
20-3131-48	20-3132-48	48"	96,800
20-3131-60	20-3132-60	60"	85,120
20-3131-72	20-3132-72	72"	78,560

APPLICATIONS

Indoor	Outdoor
Range And Dryer	Rooftop Units
Water Heater	Outdoor Dryer
Garage Heater	Stationary Outdoor
Space/wall Heater	Grill
	Gas Fire Pits

Manufactured Homes
Mobile Home Gas Meter
Crossover Gas Connection Kits

30 SERIES - 5/8" OD (1/2" ID)

RMI Part No. 1/2" MIP x 1/2" MIP	RMI Part No. 1/2" MIP x 1/2" FIP	Length	BTU Capacity (LP)
30-3131-12	30-3132-12	12"	288,000
30-3131-18	30-3132-18	18"	262,720
30-3131-24	30-3132-24	24"	240,000
30-3131-30	30-3132-30	30"	217,600
30-3131-36	30-3132-36	36"	200,000
30-3131-48	30-3132-48	48"	169,600
30-3131-60	30-3132-60	60"	149,120
30-3131-72	30-3132-72	72"	137,600

FITTINGS FOR OTHER OPTIONS

RMI Part No.*	Description
90-1022	3/8" OD Flare x 3/8" FIP
90-2022	1/2" OD Flare x 3/8" FIP
90-2031	1/2" OD Flare x 1/2" MIP (tapped 3/8" FIP)
90-2032	1/2" OD Flare x 1/2" FIP
90-3031	5/8" OD Flare (5/16"-16) x 1/2" MIP (tapped 3/8" FIP)
90-3032	5/8" OD Flare (5/16"-16) x 1/2" FIP
90-3041	5/8" OD Flare (5/16"-16) x 3/4" MIP (tapped 1/2" FIP)
91-3032	5/8" OD Flare (5/16"-16) x 1/2" FIP connector valve

*Series indicated by digit after dash in part number

SKYTECH

Black Epoxy Coated Stainless Steel Gas Connectors For gas logs and gas fireplace inserts

- Designed to reduce glare and hide the connector from view to enhance the beauty of the fire
- Hi-temperature black epoxy coating hides the connector while withstanding up to 350° F
- Black adaptors and flare nuts are plated with zinc di-chromate to further reduce the visibility of the gas connection



10A SERIES BLACK 3/8" O.D. CONNECTORS

RMI Part No. 3/8" MIP x 1/2" MIP	Length	BTU Capacity (LP)
10A-2131-12	12"	76,800
10A-2131-18	18"	70,080
10A-2131-24	24"	64,000
10A-2131-36		

20A SERIES BLACK 1/2" O.D. CONNECTORS

RMI Part No. 3/8" MIP x 1/2" MIP	Length	BTU Capacity (LP)
20A-2131-12	12"	163,200
20A-2131-18	18"	148,960
20A-2131-24	24"	136,000
20A-2131-36	36"	113,760
RMI Part No. 3/8" MIP x 1/2" FIP	Length	BTU Capacity (LP)
20A-2132-18	18"	148,960
20A-2132-24	24"	136,000

Dormont Ultraflow Connectors For Large BTU Flow Installations

APPLICATIONS

- Boilers
- Gas Meters
- Furnaces
- Commercial Water Heaters
- Gas Packs/Rooftop HVAC units
- Tankless Water Heaters

ADVANTAGES

- PVC coating will not chip or crack
- Unmatched corrosion and UV protection
- Ideal for outdoor installations (can be used inside)
- Coating includes antimicrobial agent
- Coating will not hold a flame

ULTRAflow™ CONNECTORS



41-4142-24

41 SERIES - 1 OD (3/4" ID)

RMI Part No. 3/4" MIP x 3/4" FIP	Length	BTU Capacity (LP)
41-4142-24	24"	465,440
41-4142-36	36"	409,440
41-4142-48	48"	344,000

51 SERIES CONNECTORS - 1 1/4" OD (1" ID)

RMI Part No. 1" MIP x 1" FIP	Length	BTU Capacity (LP)
51-5152-24	24"	930,880
51-5152-36	36"	825,440
51-5152-48	48"	708,320

Dormont Safety System Moveable Gas Connectors Used Primarily in Food Service Installations


AGA Listed connector features stainless steel corrugated tube with stainless braid reinforcement, outer coating for easy cleaning and quick disconnects with fusible link.

Adjustable restraining device protects connector when appliance is moved.

1" or 1 1/4" moveable connectors available upon request



1675BPQ-3

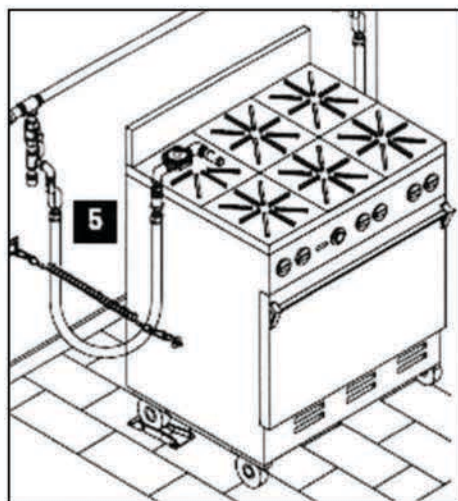

RMI Part Number w/out quick disconnect	Capacity BTU	RMI Part No. w/quick disconnect	Capacity BTU	Thread Size	Length
1650BP-36	120,000	1650BPQ-3	77,000	1/2" FNPT	36"
1650BP-48	106,000	1650BPQ-4	68,000	1/2" FNPT	48"
1650BP-60	93,000	1650BPQ-5	60,000	1/2" FNPT	60"
1650BP-72	87,000	1650BPQ-6	55,000	1/2" FNPT	72"
1675BP-3	256,000	1675BPQ-3	218,000	3/4" FNPT	36"
1675BP-4	225,000	1675BPQ-4	180,000	3/4" FNPT	48"
1675BP-5	198,000	1675BPQ-5	158,000	3/4" FNPT	60"
1675BP-6	175,000	1675BPQ-6	139,000	3/4" FNPT	72"

RESTRAINING DEVICES

RMI Part No.	Description
RDC-36	36" Restraining Device
RDC-48	48" Restraining Device
RDC-60	60" Restraining Device

THERMAL QUICK CONNECT COUPLINGS

RMI Part No.	Description
A50N	1/2 Quick Male Plug
A50C	1/2 Quick Female Socket
A75-M/F	1675BPQ (3/4") complete

add "N" for nipple or "C" for coupling only