


TRANSFER SWITCHES


RMI Part No.	Length	Description
MER421-60	5 ft.	1"-20 Male x 1"-20 Female
MER421-144	12 ft.	
MER407-36	3 ft.	POL x 1"-20 Male
MER407-48	4 ft.	
MER407-60	5 ft.	
MER407-72	6 ft.	
MER407-144	12 ft.	
MER408-60	5 ft.	9/16 - 18 LH x 9/16 - 18 LH
MER408-144	12 ft.	
MER410-24	24 in.	3/8" MNPT x 3/8" Female Flare
MER410-30	30 in.	
MER410-48	48 in.	



HOSE ASSEMBLIES

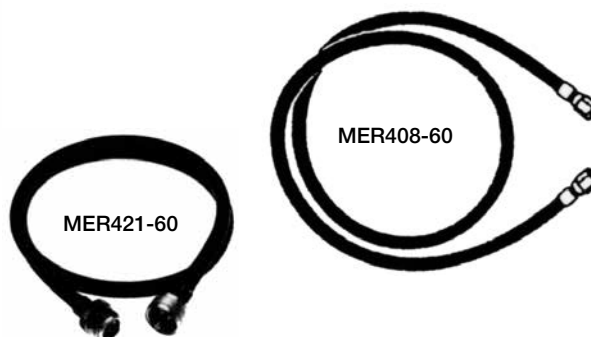

ADAPTOR TEES, CONNECTORS AND CAPS

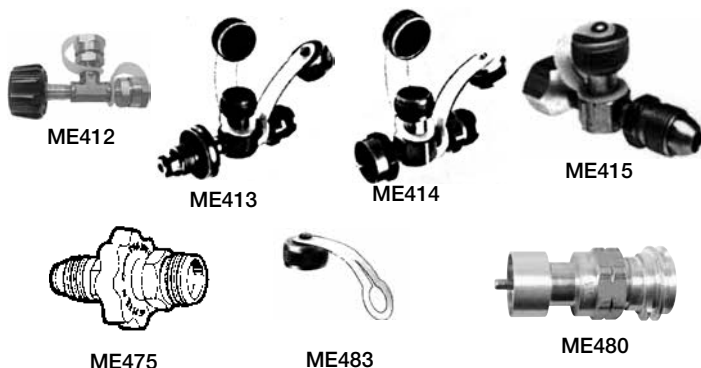

1"-20 INDIVIDUAL EXTENSION ITEMS


RMI Part No.	Description
G-432P	MPOL x 15/16" ACME and 1" 20 Male
ME412	Fem 1 5/16" ACME x 1"-20 Male x 1" 20 Male
ME413	MPOL x 1"-20 Male (2)
ME414	1"-20 Female x 1"-20 Male (2)
ME415	FPOL x MPOL x 1"-20 Male
ME420	ME415 w/1/4" fem inv. flare side outlet
ME475	Softnose handwheel POL x 1"-20 Male
ME483	1"-20 Female Cap

SECOND CHANCE GRILL ADAPTOR

ME480	Female 1"-20 x 1 5/16" M ACME
-------	-------------------------------


RMI Part No.	Description
ME487	FPOL x 1"-20 Female
ME488	1"-20 Female x 1/4" MNPT
ME492	1"-20 Male x 1/4" FNPT
ME417	1"-20 Male x 1/4" MNPT w/check and o-ring
ME493	1"-20 Male x 9/16" - 18LH w/check and o-ring
ME494	1"-20 Male x 9/16" - 18LH w/check w/o o-ring

BRASS FITTINGS

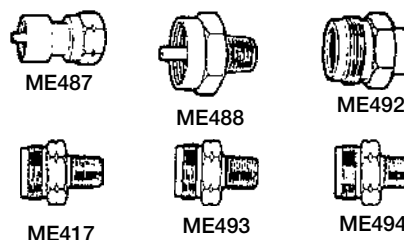


RV AND CAMPING HOSE KITS

FLOW LONGER KIT

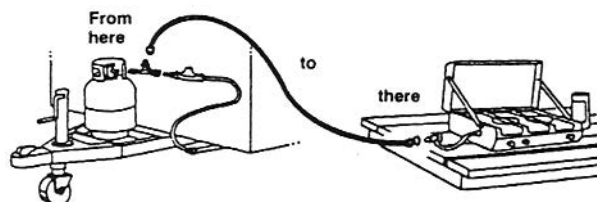

STAY LONGER KIT



RMI Part No.	Adaptor Kit	Kit Contains
MER470	Flow Longer Kit	ME415 tee and ME421-144
MER471	Flow Longer-Plus Kit	G-423P and ME421-144
MER472	Stay-Longer Kit	ME420 tee and 5' pigtail w/MPOL x 1/4" inv flare rods
MER473	Stay-Longer-Plus Kit	ME420 tee, 5' pigtail w/MPOL x 1/4" inv flare rods and ME421-144

STURGIS FUEL GAS OUTLET CONNECTION FOR INDOOR & OUTDOOR USE



AGA Certified

- Capacity: 42,000 BTU/Hr.
- Built-in thermal protection prevents gas flow if connection is exposed to temperatures in excess of 200°F.
- 1/2 PSI max inlet pressure.



Model 3/375

RMI Part No.	Description	Inlet	Outlet
103028	Model 3/375	1/2" FNPT 90° & Plug	1/2" M SAE
103029	Model 3/375	1/2" FNPT 90° & Plug	3/8" FNPT
103030	Model 3/375	1/2" FNPT 90°	48" x 3/8" ID Indoor Appliance Connector & Plug
103031	Model 3/375	1/2" FNPT 90°	144" x 3/8" ID Outdoor Appliance Connector w/ Integral Plug
103040	Model 3/375 Dual	1/2" FNPT 90°	Two 3/8" FPT



Outdoor Appl. Conn. 12 ft.
P/N 100013




Cover Kit
P/N 206001

GAS CONNECTION ACCESSORIES KITS

RMI Part No.	Description	Inlet	Outlet
104001	Quick Connector (outdoor)	3/8" FPT	CSN-375 F.
104007	Quick Connector Socket/Valve	3/8" FPT	3/375 F.
104014	Quick Connector Socket/Valve	1/2" FPT 90°	3/375 F.
401207	Connector Plug	3/375M	3/8" FPT
401213	Connector Plug	3/375M	1/2" SAE (M)
302001	Dust Cap	--	--
302003	Dust Plug	--	--
206001	Cover Kit	For use w/all outlets	
206003	Enclosure Kit	For use in enclosed space	
100013	Outdoor Appl. Conn. 12'	3/375M	3/8" SAE (F)
100462-144	Outdoor Appl. 12' S/S Braid	3/375M	3/8" SAE (F)


GAS-MATE II QUICK CONNECT AGA Approved

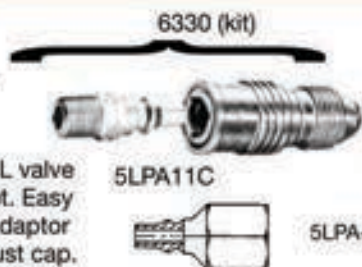

Changes standard POL valve to quick connect outlet. Easy to install kit includes adaptor regulator fitting and dust cap.

RMI Part No.	Description
6330	Gas Mate Kit (Type 2 assembly w/socket & fill adapter)
6334	Gas Mate II Socket only
5LPA-7	Gas Mate II Plug only
6330-CAP	Gas Mate II dust cap
5LPA-FPC	Fill Adapter, POL to Gas Mate II (Type 2)
5LPA11C	Gas Mate Plug only (with limiter)

HANSEN GAS-MATE COUPLINGS

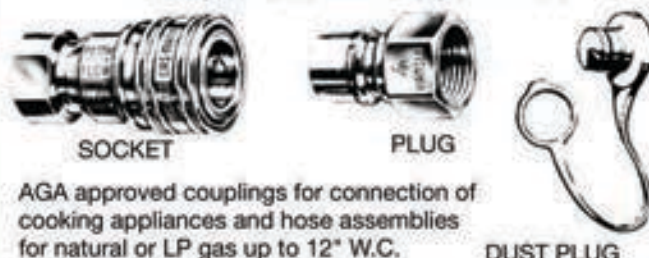

AGA approved couplings for connection of cooking appliances and hose assemblies for natural or LP gas up to 12" W.C.

Female Socket	Male Plug	Thread Size	Plastic Dust Plug	Metal Dust Cap
HAN100-006	HAN100-506	3/8"	HANPSDC-2HK	HANPDC-2HK
HAN100-008	HAN100-508	1/2"	HANPSDC-3HK	HANPDC-3HK
HAN100-010	HAN100-510	3/4"	HANPSDC-4HK	HANPDC-4HK
HAN100-012	HAN100-512	1"	HANPSDC-6HK	--

HANSEN ONE-WAY SHUT-OFF QUICK HOSE COUPLING

LP gas only-high or low pressure.



FEMALE SOCKETS

RMI Part No.			Size
Female NPT	Male NPT	Hose Barbs	
HAN1000	HAN1100	HAN1600	1/4"
HAN1200	HAN1300	HAN1700	3/8"

MALE PLUGS

RMI Part No.			Size
Female NPT	Male NPT	Hose Barbs	
HAN11	HAN10	HAN16	1/4"
HAN15	HAN14	HAN17	3/8"

BARBEQUE GAS OUTLET BOXES



BBQ-4W

STAINLESS STEEL GAS OUTLET BOX

- Constructed of weather durable brushed stainless steel
- Direct connection to existing residential gas system
- Choice of recessed or surface mount single outlet or surface mount double outlet
- Recessed model has lockable door that swings out with "gas" identification
- Surface mount models has flip-open door that swings up for access
- Easy access kwik disconnect safety shut-off
- Compatible with Hansen fittings only
- 60,000 btu's - Natural gas / 90,000 btu's - LP gas per outlet

RMI Part No.	Description
BBQ-4SS	Recessed, single outlet, lockable, box w/swing open door
BBQ-4SM	Surface mount, single outlet box with flip open door
BBQ-DBL-SS	Surface mount, double outlet box with flip open door
BBQ-4HOSE	3/8" M X 3/8" F 10 foot hose
HAN100-506	Hansen 3/8" Male plug

PVC GAS OUTLET BOX

- Constructed of weather durable UV rated PVC in either white or grey
- Direct connection to existing residential gas system
- PVC models has flip-open door that swings up for access
- Easy access kwik disconnect safety shut-off
- Comes with standoffs for siding installations
- Compatible with Hansen fittings only
- 75,000 btu's - Natural gas / 118,000 btu's - LP

RMI Part No.	Description
BBQ-4G	Surface mount, GREY, single outlet box with flip open door
BBQ4W	Surface mount, WHITE, single outlet box with flip open door
BBQ-4HOSE	3/8" M X 3/8" F 10 foot hose
HAN100-506	Hansen 3/8" Male plug



ME951BLK

MEC GAS BOX

APPLICATION

Utilizes standard LP Gas outdoor appliance regulator and connector. Both models provide full capacity operation at 10 PSI or higher inlet pressures for all outdoor appliances without modification of the hassles of a 20 lb. cylinder. Simply thread the Type I QCC or POL connector onto the MEC Gas Box, turn on the shutoff valve, and enjoy continuous LP Gas flow.

FEATURES

- Universal 1 5/16" M. ACME/F. POL Outlet Connection
- Universal 1/2" FNPT Inlet Connection
- Primary Shutoff Valve for each Outlet Connection
- Secondary Safety shutoff Poppet at each Outlet for Zero Discharge at Disconnect
- For Use with 0-350 PSI Inlet Pressure
- Universal Mounting Hardware
- Hinged Cover with Latching Mechanism
- Weather Resistant Nylon Case

RMI Part No.	Description	Color
ME951BLK	Single 1 5/16" M. ACME/F. POL with 1/2" FNPT Inlet	Black
ME951GRY	Single 1 5/16" M. ACME/F. POL with 1/2" FNPT Inlet	Grey
ME951IVY	Single 1 5/16" M. ACME/F. POL with 1/2" FNPT Inlet	Ivory
ME952BLK	Dual 1 5/16" M. ACME/F. POL with 1/2" FNPT Inlet	Black
ME952GRY	Dual 1 5/16" M. ACME/F. POL with 1/2" FNPT Inlet	Grey
ME952IVY	Dual 1 5/16" M. ACME/F. POL with 1/2" FNPT Inlet	Ivory

MEC GAS BOX ACCESSORIES

RMI Part No.	Description	Length
MER428-60	Extension Hose Assembly (M. QCC/F. POL x F. QCC)	60"
MER428-120	Extension Hose Assembly (M. QCC/F. POL x F. QCC)	120"